





# 3.2

## Ordering details / Dimension drawing

EXIT / EXIT 24 V / EXIT N / EXIT CG-S for Zone 1/21

### Ordering details

Type	Scope of delivery	Cable gland/Thread			Standard pictogram ISO 7010 Order No.	optional pictogram according to	
		Plastic cable glands M20	Screw plug M20	Metal thread M20		DIN 4844 Order No.	EN 1838 Order No.
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2191 000 021</b>	<b>1 2191 000 001</b>	<b>1 2191 000 011</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2191 000 022</b>	<b>1 2191 000 002</b>	<b>1 2191 000 012</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2191 000 023</b>	<b>1 2191 000 003</b>	<b>1 2191 000 013</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2191 000 004</b>		
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2191 000 121</b>	<b>1 2191 000 101</b>	<b>1 2191 000 111</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2191 000 122</b>	<b>1 2191 000 102</b>	<b>1 2191 000 112</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2191 000 123</b>	<b>1 2191 000 103</b>	<b>1 2191 000 113</b>
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2191 024 021</b>	<b>1 2191 024 001</b>	<b>1 2191 024 011</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2191 024 022</b>	<b>1 2191 024 002</b>	<b>1 2191 024 012</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2191 024 023</b>	<b>1 2191 024 003</b>	<b>1 2191 024 013</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2191 024 004</b>		
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2191 024 121</b>	<b>1 2191 024 101</b>	<b>1 2191 024 111</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2191 024 122</b>	<b>1 2191 024 102</b>	<b>1 2191 024 112</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2191 024 123</b>	<b>1 2191 024 103</b>	<b>1 2191 024 113</b>
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2191 030 021</b>	<b>1 2191 030 001</b>	<b>1 2191 030 011</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2191 030 022</b>	<b>1 2191 030 002</b>	<b>1 2191 030 012</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2191 030 023</b>	<b>1 2191 030 003</b>	<b>1 2191 030 013</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2191 030 004</b>		
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2191 030 121</b>	<b>1 2191 030 101</b>	<b>1 2191 030 111</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2191 030 122</b>	<b>1 2191 030 102</b>	<b>1 2191 030 112</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2191 030 123</b>	<b>1 2191 030 103</b>	<b>1 2191 030 113</b>
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2191 020 021</b>	<b>1 2191 020 001</b>	<b>1 2191 020 011</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2191 020 022</b>	<b>1 2191 020 002</b>	<b>1 2191 020 012</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2191 020 023</b>	<b>1 2191 020 003</b>	<b>1 2191 020 013</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2191 020 004</b>		
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2191 020 121</b>	<b>1 2191 020 101</b>	<b>1 2191 020 111</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2191 020 122</b>	<b>1 2191 020 102</b>	<b>1 2191 020 112</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2191 020 123</b>	<b>1 2191 020 103</b>	<b>1 2191 020 113</b>
including cover, clear, without pictogram			2 x M20	<b>1 2191 020 104</b>			

Other silk-screen pictograms or inscriptions available on request

A wide selection of cable glands can be found at [www.crouse-hinds.de/products](http://www.crouse-hinds.de/products) or in the catalogue Part 2, Section 3



arrow 3h




arrow 9h



arrow 6h

### EXIT / EXIT CG-S / EXIT N

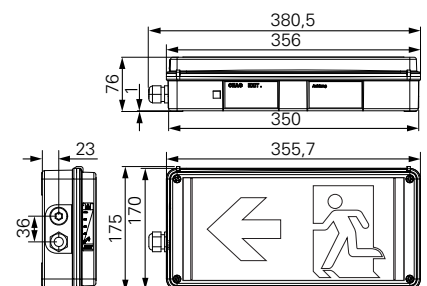






Dimensions in mm

# Ordering details / Dimension drawing

EXIT 2 / EXIT 2 24 V / EXIT 2 N / EXIT 2 CG-S for Zone 2/22

# 3.2

## Ordering details

Type	Scope of delivery	Cable gland/Thread			Standard pictogram ISO 7010  Order No.
		Plastic cable glands M20	Screw plug M20	Metal thread M20	
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2193 000 021</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2193 000 022</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2193 000 023</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2193 000 004</b>
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2193 000 121</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2193 000 122</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2193 000 123</b>
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2193 024 021</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2193 024 022</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2193 024 023</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2193 024 004</b>
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2193 024 121</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2193 024 122</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2193 024 123</b>
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2193 030 021</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2193 030 022</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2193 030 023</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2193 030 004</b>
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2193 030 121</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2193 030 122</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2193 030 123</b>
	including cover with silk-screen pictogram (arrow 3h)	1 x M20	1 x M20		<b>1 2193 020 021</b>
	including cover with silk-screen pictogram (arrow 9h)	1 x M20	1 x M20		<b>1 2193 020 022</b>
	including cover with silk-screen pictogram (arrow 6h)	1 x M20	1 x M20		<b>1 2193 020 023</b>
	including cover, clear, without pictogram	1 x M20	1 x M20		<b>1 2193 020 004</b>
	including cover with silk-screen pictogram (arrow 3h)			2 x M20	<b>1 2193 020 121</b>
	including cover with silk-screen pictogram (arrow 9h)			2 x M20	<b>1 2193 020 122</b>
	including cover with silk-screen pictogram (arrow 6h)			2 x M20	<b>1 2193 020 123</b>
	including cover, clear, without pictogram			2 x M20	<b>1 2193 020 104</b>

Other silk-screen pictograms or inscriptions available on request

A wide selection of cable glands can be found at [www.crouse-hinds.de/products](http://www.crouse-hinds.de/products) or in the catalogue Part 2, Section 3



arrow 3h




arrow 9 h



arrow 6 h

## EXIT 2 / EXIT 2 CG-S / EXIT 2 N

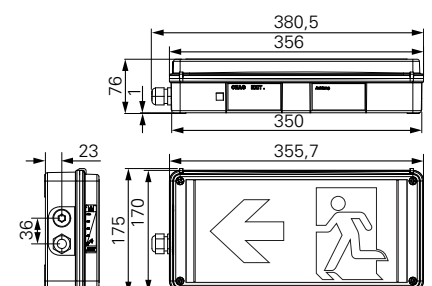

Dimensions in mm

# 3.2

## Technical data

EXIT / EXIT 24 V / EXIT N / EXIT CG-S for Zone 1/21



### Technical data

	EXIT / EXIT 24 V	EXIT N	EXIT CG-S
EC-Type Examination Certificate	BVS 09 ATEX E 029	BVS 09 ATEX E 029	BVS 09 ATEX E 029
IECEX Certificate of Conformity	IECEX BVS 13.0017	IECEX BVS 13.0017	IECEX BVS 13.0017
Marking accd. to 94/9/EC	⊕ II 2 G Ex e ib mb IIC T6/T5 Gb ⊕ II 2 D Ex tb IIIC T80°C Db	⊕ II 2 G Ex e ib mb IIC T5/T4 Gb ⊕ II 2 D Ex tb IIIC T80°C Db"	⊕ II 2 G Ex e ib mb IIC T6/T5 Gb ⊕ II 2 D Ex tb IIIC T80°C Db
Marking accd. to IECEx	Ex e ib mb IIC T6/T5 Gb Ex tb IIIC T80°C Db	Ex e ib mb IIC T5/T4 Gb Ex tb IIIC T80°C Db	Ex e ib mb IIC T6/T5 Gb Ex tb IIIC T80°C Db
Permissible ambient temperature	-20 °C up to +40°C (T6) -20 °C up to +50°C (T5)	-20 °C up to +40°C (T5) -20 °C up to +50°C (T4) +5 °C up to +35 °C	-20 °C up to +40°C (T6) -20 °C up to +50°C (T5)
specified data			
Battery		12 V/600 mAh NC-Accu	
Rated power consumption	approx. 6 VA	approx. 8 VA	approx. 6 VA
Rated voltage	110 V - 277 V AC 110 V - 250 V DC	110 V - 277 V AC 110 V - 250 V DC	220 V - 254 V AC 195 V - 250 V DC
Rated voltage EXIT 24 V	12 - 24 V DC (-15 % / + 20 %)		
Rated current AC/DC	220 V = 20 mA, 110 V = 40 mA	220 V = 27 mA, 110 V = 54 mA	220 V = 20 mA, 110 V = 40 mA
Frequency	DC and 50 - 60 Hz (AC)	DC and 50 - 60 Hz (AC)	DC and 50 - 60 Hz (AC)
Charging duration for capacity > 90 %		24 h	
Power factor cos φ	≥ 0.95	≥ 0.95	≥ 0.95
Circuit	electronic power supply	electronic power supply	electronic power supply
Protection class	I	I	I
Viewing distance	25 m	25 m	25 m
Lamp / Illuminant	high output-LEDs, white	high output-LEDs, white	high output-LEDs, white
Rated emergency lighting duration		approx. 3 h	
Dimensions (L x W x H)	356 x 175 x 76 mm	356 x 175 x 76 mm	356 x 175 x 76 mm
Connecting terminals	3 x loop terminal 2.5 mm <sup>2</sup>	3 x loop terminal 2.5 mm <sup>2</sup>	3 x loop terminal 2.5 mm <sup>2</sup>
Enclosure colour	grey, RAL 7035	grey, RAL 7035	grey, RAL 7035
Enclosure material	Polycarbonate	Polycarbonate	Polycarbonate
Weight	2 kg	2.5 kg	2.2 kg
Cable glands / gland plates / enclosure drilling	1 x Ex-e cable glands M20 x 1.5 (plastic) / 1 x Ex-e-screw plug M20 or 2 x M20 x1.5 metal thread, 1 x screw plug M20	1 x Ex-e cable glands M20 x 1.5 (plastic) / 1 x Ex-e-screw plug M20 or 2 x M20 x1.5 metal thread, 1 x screw plug M20	1 x Ex-e cable glands M20 x 1.5 (plastic) / 1 x Ex-e-screw plug M20 or 2 x M20 x1.5 metal thread, 1 x screw plug M20
Type of mounting	wall mounting	wall mounting	wall mounting
Degree of protection accd. to EN 60529	IP66	IP66	IP66
Protective cover / protective bowl	Polycarbonate	Polycarbonate	Polycarbonate



3

### Technical data

	EXIT 2/ EXIT 2 24 V	EXIT 2 N	EXIT 2 CG-S
EC-Declaration of Conformity	CCH 13 ATEX 1019	CCH 13 ATEX 1019	CCH 13 ATEX 1019
Marking accd. to 94/9/EC	⊕ II 3 G Ex e ic mc IIC T6/T5 Gc ⊕ II 3 D Ex tc IIIC T80°C Dc	⊕ II 3 G Ex e ic mc IIC T5/T4 Gc ⊕ II 3 D Ex tc IIIC T80°C Dc	⊕ II 3 G Ex e ic mc IIC T6/T5 Gc ⊕ II 3 D Ex tc IIIC T80°C Dc
Permissible ambient temperature	-20 °C up to +40°C (T6) -20 °C up to +50°C (T5)	-20 °C up to +40°C (T5) -20 °C up to +50°C (T4) +5 °C up to +35 °C	-20 °C up to +40°C (T6) -20 °C up to +50°C (T5)
specified data			
Battery		12 V/600 mAh NC-Accu	
Rated power consumption	approx. 6 VA	approx. 8 VA	approx. 6 VA
Rated voltage	110 V - 277 V AC 110 V - 250 V DC	110 V - 277 V AC 110 V - 250 V DC	220 V - 254 V AC 195 V - 250 V DC
Rated voltage EXIT 24 V	12 - 24 V DC (-15 % / + 20 %)		
Rated current AC/DC	220 V = 20 mA, 110 V = 40 mA	220 V = 27 mA, 110 V = 54 mA	220 V = 20 mA, 110 V = 40 mA
Frequency	DC and 50 - 60 Hz (AC)	DC and 50 - 60 Hz (AC)	DC and 50 - 60 Hz (AC)
Charging duration for capacity > 90 %		24 h	
Power factor cos φ	≥ 0.95	≥ 0.95	≥ 0.95
Circuit	electronic power supply	electronic power supply	electronic power supply
Protection class	I	I	I
Viewing distance	25 m	25 m	25 m
Lamp / Illuminant	high output-LEDs, white	high output-LEDs, white	high output-LEDs, white
Rated emergency lighting duration		approx. 3 h	
Dimensions (L x W x H)	356 x 175 x 76 mm	356 x 175 x 76 mm	356 x 175 x 76 mm
Connecting terminals	3 x loop terminal 2 x 2.5 mm <sup>2</sup>	3 x loop terminal 2 x 2.5 mm <sup>2</sup>	3 x loop terminal 2 x 2.5 mm <sup>2</sup>
Enclosure colour	grey, RAL 7035	grey, RAL 7035	grey, RAL 7035
Enclosure material	Polycarbonate	Polycarbonate	Polycarbonate
Weight	2 kg	2.5 kg	2.2 kg
Cable glands / gland plates / enclosure drilling	1 x Ex-e cable glands M20 x 1.5 (plastic) / 1 x Ex-e-screw plug M20 or 2 x M20 x1.5 metal thread, 1 x screw plug M20	1 x Ex-e cable glands M20 x 1.5 (plastic) / 1 x Ex-e-screw plug M20 or 2 x M20 x1.5 metal thread, 1 x screw plug M20	1 x Ex-e cable glands M20 x 1.5 (plastic) / 1 x Ex-e-screw plug M20 or 2 x M20 x1.5 metal thread, 1 x screw plug M20
Type of mounting	wall mounting	wall mounting	wall mounting
Degree of protection accd. to EN 60529	IP66	IP66	IP66
Protective cover / protective bowl	Polycarbonate	Polycarbonate	Polycarbonate